

# Mybb 开源论坛系统 ( Centos 7.2 64 位 )

# 文档更改记录

日期	修改人	版本
2017年9月23日	康展云计算	V1.0
2018年11月26日	康展云计算	V1.1

常见问题说明:	
1、获取 FTP 及 mysql 数据库权限	2
2、账号密码安全提醒	2
3、Mybb 网站安装方法	6
<b>4</b> 、软件安装路径	11
5、绑定域名	12
6. 党田命令	12



# 常见问题说明:

操作系统为 centos 7.2 64 位, 谢谢您支持康展云计算。

# 1、获取 FTP 及 mysql 数据库权限

远程登录服务器:

下载 linux 端的远程工具 putty

下载后解压并打开 putty.exe , 并输入您的服务器 IP 及端口 , 端口一般默认为 22。

输入 cat default.pass

里面有数据库的 root 权限,自动生成数据库名,FTP 权限。

数据库的管理地址为:http://您的ip/phpmyadmin/

# 2、账号密码安全提醒

FTP 权限,数据库权限是随机生成的,存放在 default.pass 文件里;建议您修改一个您自己设置的复杂些的密码。

(1) ftp 密码修改:服务器命令行输入 passwd www 后回车 (www 为 ftp 用户名)



# 输入新的 ftp 密码后回车 (密码不显示)

```
[root@VM_16_6_centos ~]# passwd www
Changing password for user www.
New password:
```

需再次输入密码确认后回车 (密码不显示)

```
[root@V] _____centos ~]# passwd www
Changing password for user www.
New password:
Retype new password:
```

# 密码修改成功:

```
[root@Valle_centos ~] # passwd www
Changing password for user www.
New password:
Retype new password:
passwd: all authentication tokens updated successfully.
```

# (2) 关闭 ftp 方法:


在服务器命令行里输入: systemctl stop vsftpd.service

```
[root@VM_____centos ~] # systemctl stop vsftpd.service [root@VM_____centos ~] #
```


# (3) mysql 修改 root 密码方法:

登录数据库管理工具 phpmyadmin, 地址为: http://您的云主机公网 ip/phpmyadmin/



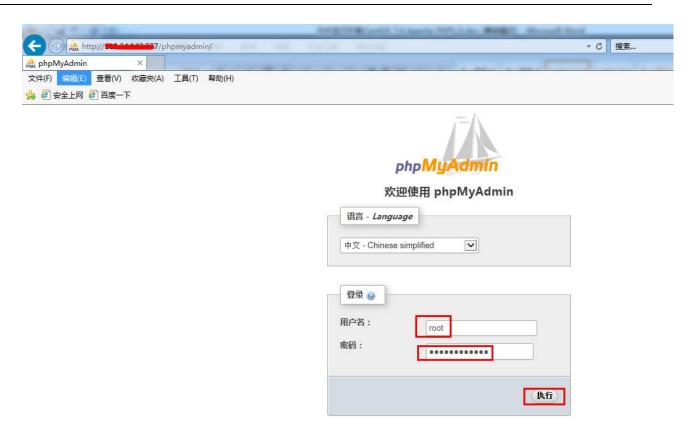

# 点击修改密码

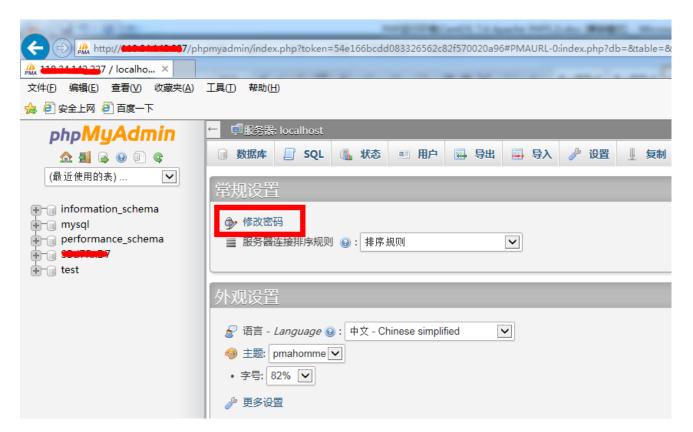



# 2次输入新密码后,点击执行,新密码生效



# (4) 关闭 mysql 方法

服务器命令行直接输入命令 systemctl stop mysqld.service 将关闭 mysql 数据库

```
[root@VNimble_centos ~]# systemctl stop mysqld.service [root@VNimble_centos ~]#
```




# 3、Mybb 网站安装方法

Mybb 访问安装地址为: <a href="http://您的云主机公网 IP/index.php">http://您的云主机公网 IP/index.php</a> (或者用您的域名解析到您的 IP 后,用域名访问安装)。

1) 在浏览器中输入地址,开始安装,如下:




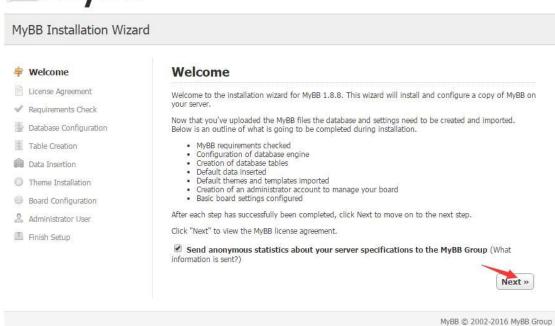

2)使用协议,如下:



### MyBB Installation Wizard

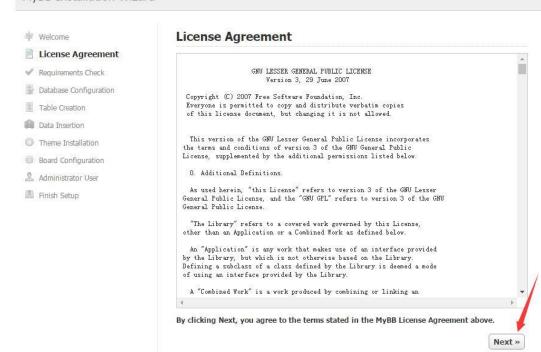

**Requirements Check** 


Supported Translation Extensions:

PHP XML Extensions:

# 3)检测环境配置,如下:



# MyBB Installation Wizard



# Before you can install MyBB, we must check that you meet the minimum requirements for installation. Requirements Check Requirements PHP Version: 7.0.10 Supported DB Extensions: MySQL Improved, SQLite 3

Multi-Byte, iconv

Next »

Installed

Configuration File Writable:

Settings File Writable:

Cache Directory Writable:

File Uploads Directory Writable:

Avatar Uploads Directory Writable:

Writable

Writable


Congratulations, you meet the requirements to run MyBB.

Click Next to continue with the installation process.

# 4)配置数据库连接信息,如下:




Theme Installation
Board Configuration
Administrator User
Finish Setup

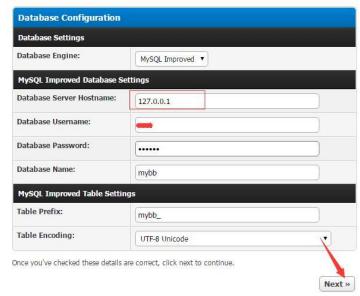

Creating table mybb\_spiders...done
Creating table mybb\_stats...done
Creating table mybb\_tats...done
Creating table mybb\_tatsk...done
Creating table mybb\_templategroups...done
Creating table mybb\_templates...done
Creating table mybb\_templatess...done
Creating table mybb\_templatesst...done
Creating table mybb\_themes...done
Creating table mybb\_threadprefixes...done
Creating table mybb\_threadprefixes...done
Creating table mybb\_threadfrefixes...done
Creating table mybb\_threadfrefixes...done
Creating table mybb\_threadfrefixes...done
Creating table mybb\_threadfrefixed...done
Creating table mybb\_threadfrefixed...done
Creating table mybb\_userfixeds...done
Creating table mybb\_userfixeds...done
Creating table mybb\_usergroups...done
Creating table mybb\_usergroups...done
Creating table mybb\_warningtypes...done
Creating table mybb\_warningtypes...done
Creating table mybb\_warningtypes...done
Creating table mybb\_warnings...done






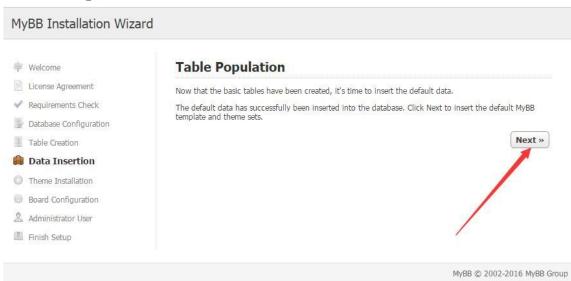

# 5)安装主题,如下:




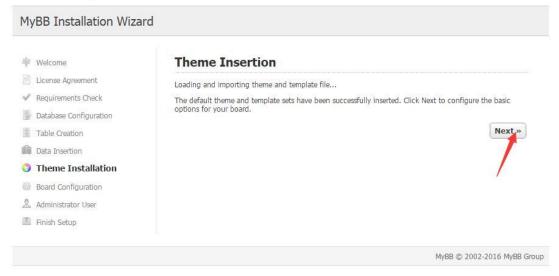


# 6)配置网站连接,如下:

Next »



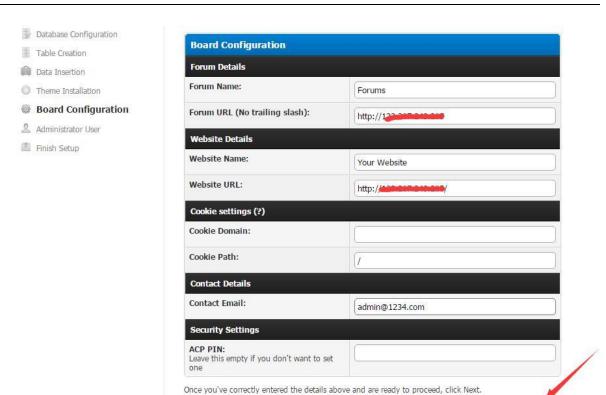


# 7)配置网站后台登录账号和密码,如下:

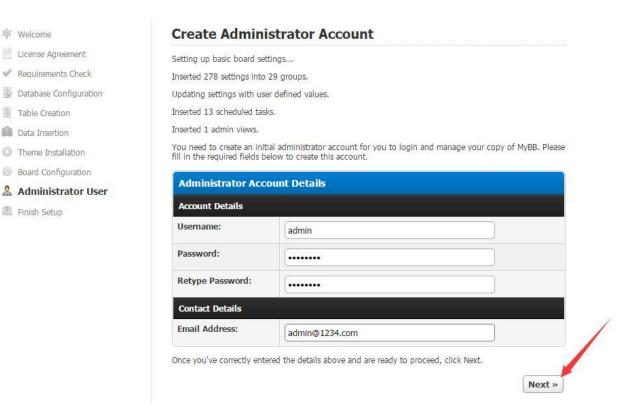

# 8) 安装完毕,如下:





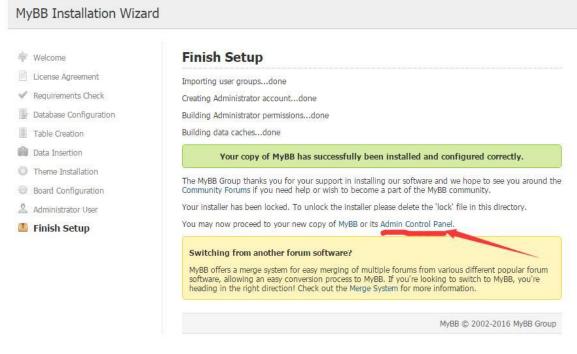

至此,站点就已经安装完成了。

# 4、软件安装路径

软件名称	路径地址
默认站点 www 根目录	/yjdata/www/wwwroot
Apache2.4.6	/etc/httpd
Php7.0	/usr/local/php
mysql5.6	/var/lib/mysql
Mybb_1808	/yjdata/www/wwwroot
Vsftpd3.0.2	/etc/vsftpd



# 5、绑定域名

默认 IP 已经可以访问,您的域名解析到 IP 后即可使用!

如果需要在服务器里做绑定操作,按如下:

打开配置文件 vim /etc/httpd/conf/httpd.conf 找到 Servername 选项,

```
severalments address appears on some server-generated pages, such
as error documents e.g. adminisyour-domain.com

ServerAdmin root@localhost

ServerName gives the name port that the server uses to identify itself.
This can often be determined administratily, but we recommend you specify
it explicitly to prevent problems during status.

If this is not set to walle DNS name for your host, server-generated
redurections will not work. See also the UseCamonicalName directive.

If your host doesn't have a registered DNS name, enter its IR address here.
You will have to access it by its address anyway, and this will make
redurections work in a semaible way.

ServerName www.example.com:80

GecCamonicalName: Determines how Apache constructs self-referencing
URLs and the SERVER NAME and SERVER PORT variables.
When set "Off", Apache will use the Hostname and Fort supplied
```

将 localhost 改为 www.XXX.com 即可 (www 后面用您自己的域名代替)

# 6、常用命令

服务启动,停止,重启操作

mysql: systemctl (start|stop|restart) mysqld.service

vsftpd: systemctl (start|stop|restart) vsftpd.service

httpd: systemctl (start|stop|restart) httpd.service